

Fig. 1

0906390-092704

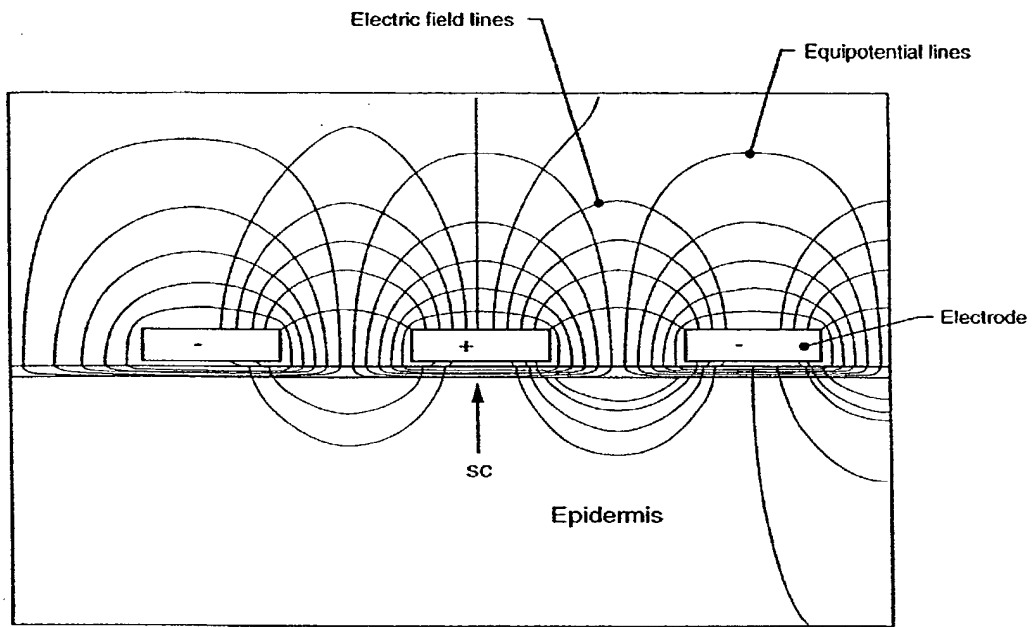


Fig. 2

056350-062701

FIELD STRENGTH BELOW AN ELECTRODE BEFORE BREAKDOWN OF THE S.C.

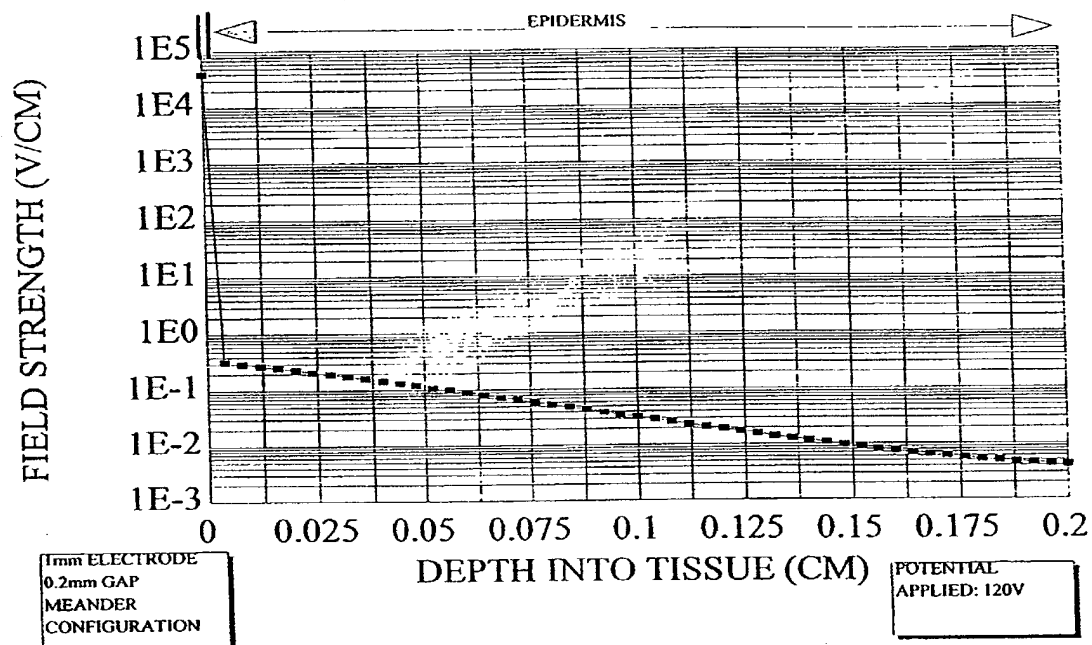


Fig. 3A

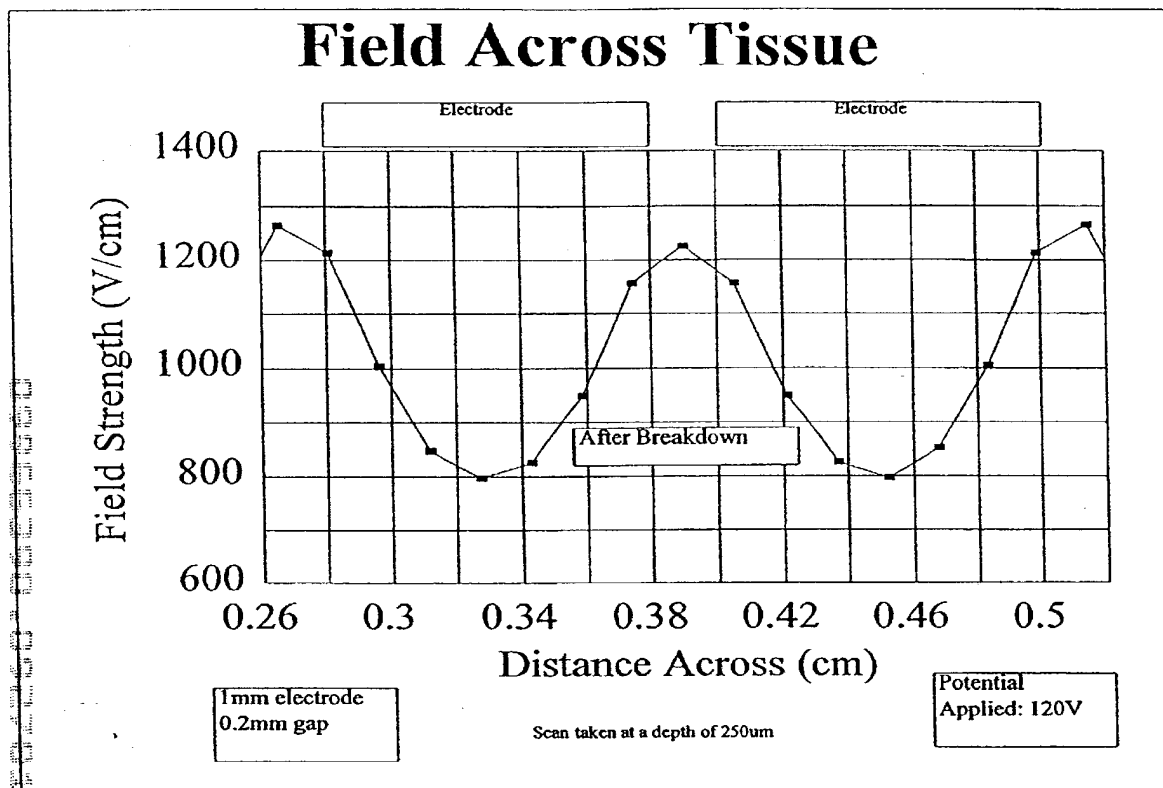


Fig. 4A

104260"0529550



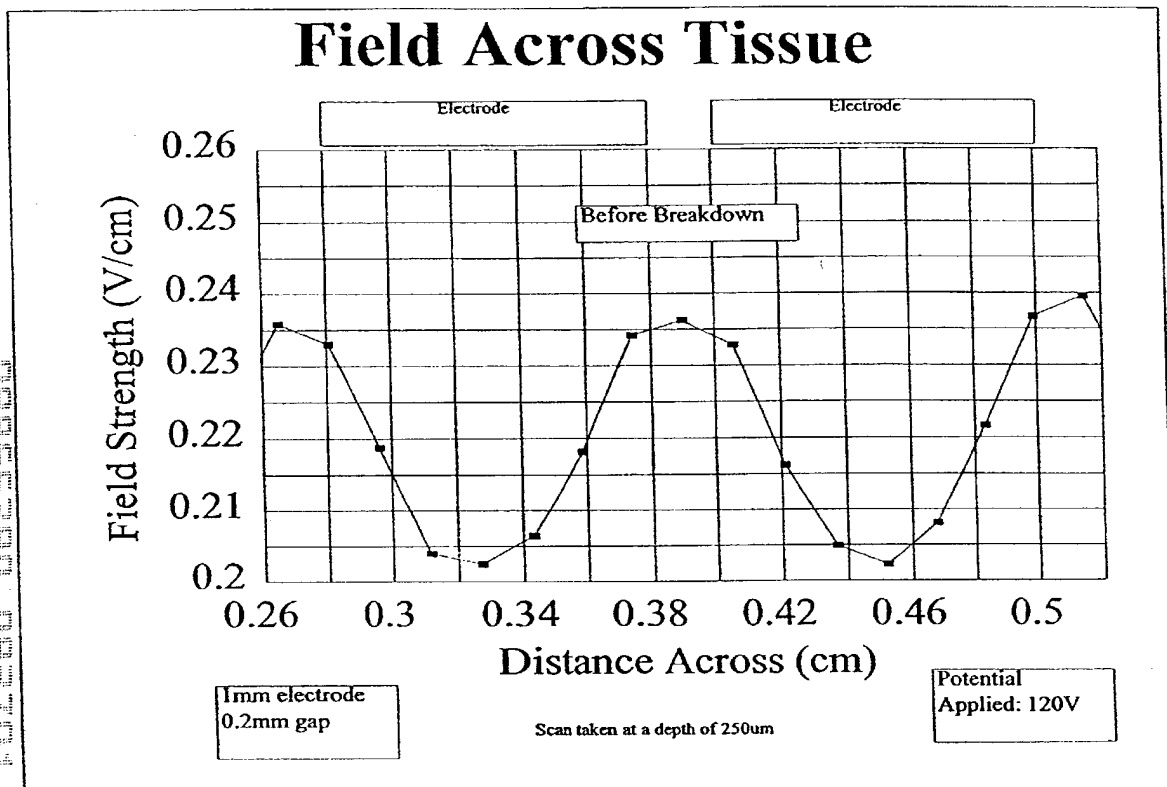


Fig. 4B

102260-05E99660

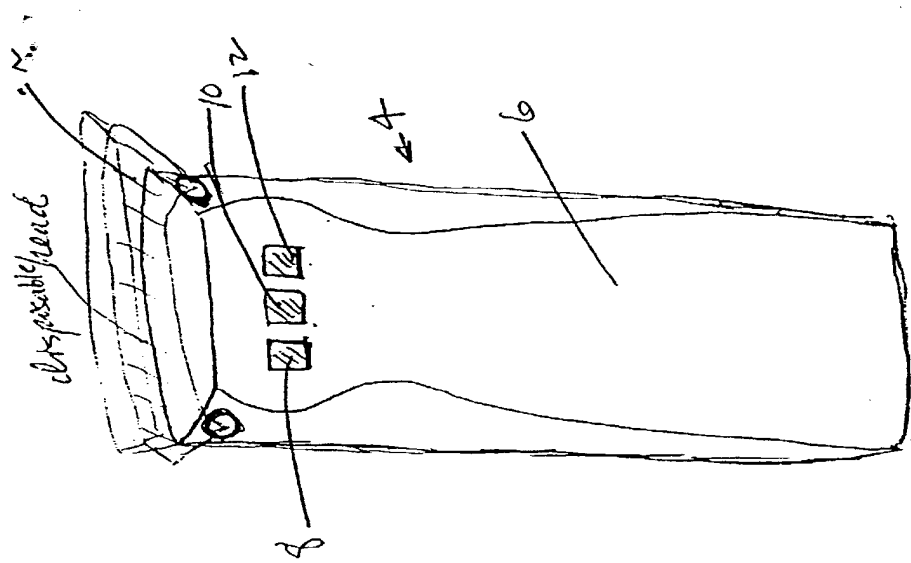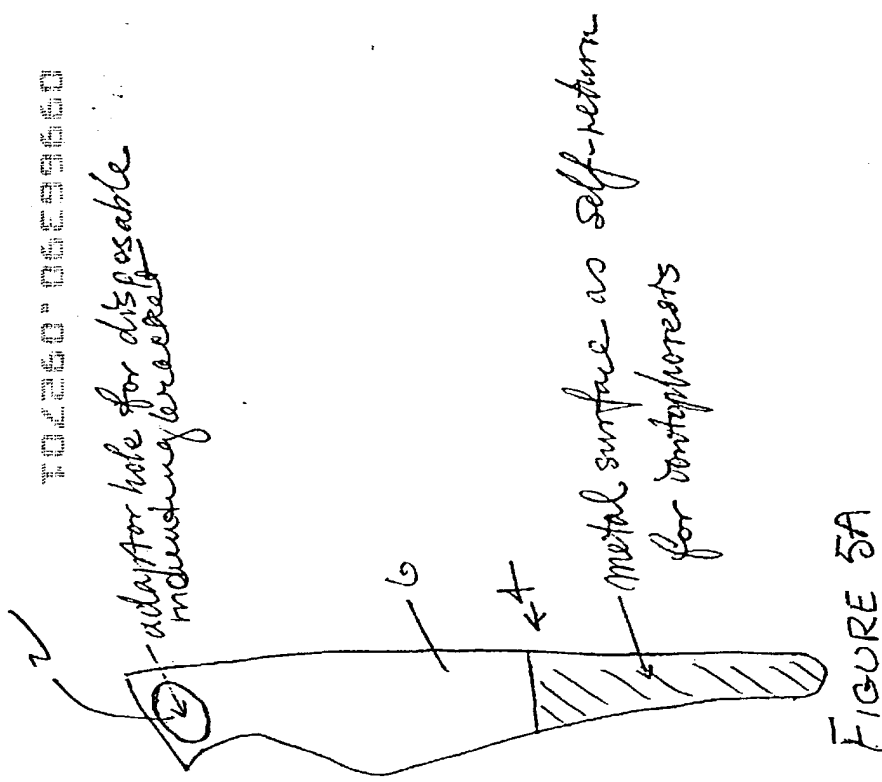

Battery-powered hand held pulser
FIGURES 5A & B

adaptor with disposable electro-coagulator lead.

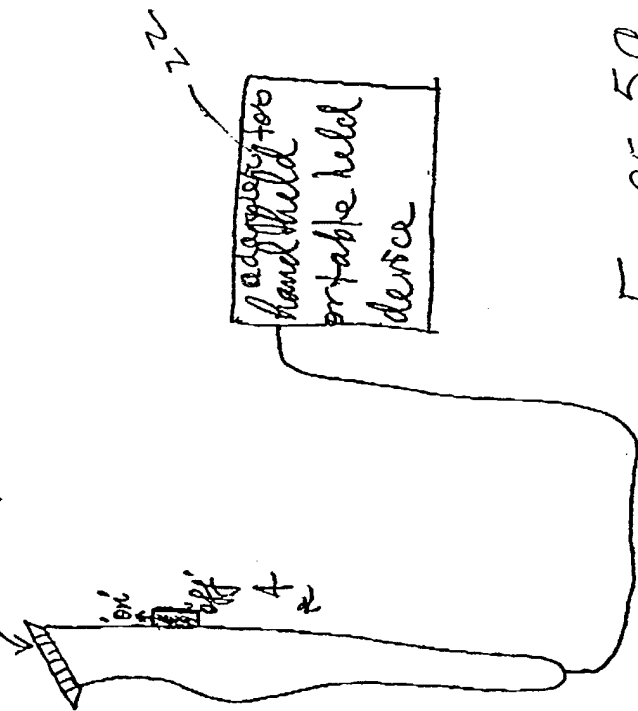


FIGURE 5C

(a) square type:



FIGURE 6A to attach to pulser


(top view)



Adhesive film to peel.

(side view) 18
FIGURE 6B


(c) moon type:

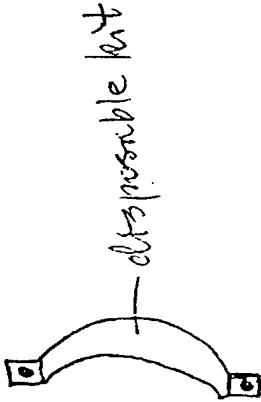

(top view)

FIGURE 6C

(d) round type

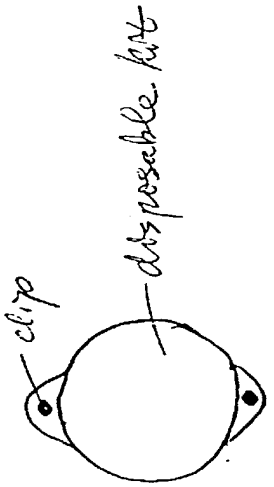

(top view)
FIGURE 6D

(e) roller type


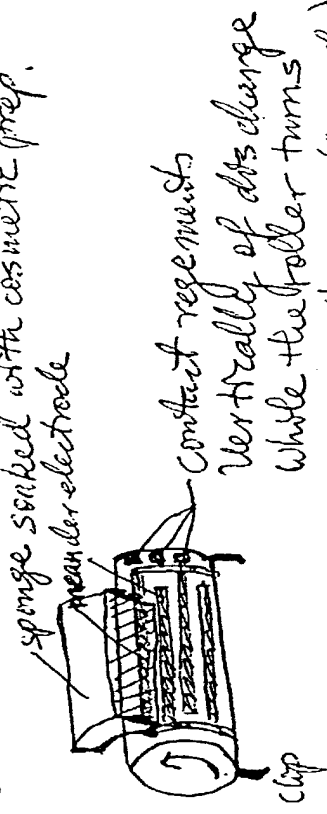


FIGURE 6E

FIGURES 6A-E Different Configurations of disposable mounting bracket
(size can be small or large)

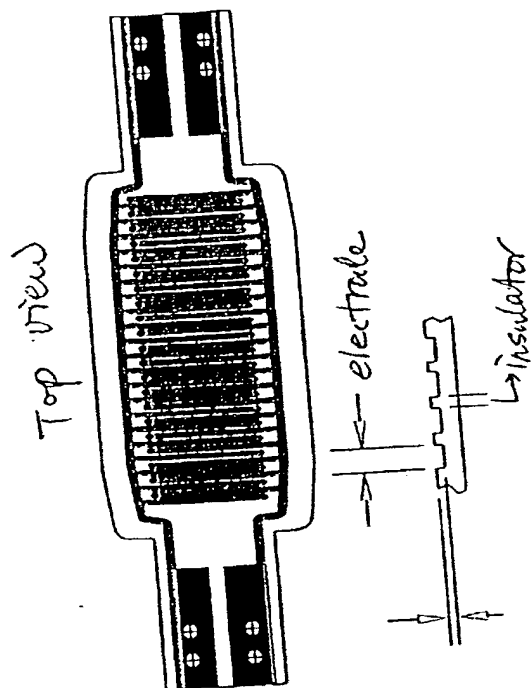

porous electrode
FIGURE 7